



PRODUCT SPECIFICATIONS

NAME: 1~10W 220V AC LED Tube Emergency Kit

ORDER CODE#: LM0103C006A

TYPE: LED Emergency Ballast
LED Emergency Driver
LED Emergency Conversion Kit

SUB-TYPE: LED Emergency Ballast

UPDATED: 2019-12-18

APPLICABLE FOR: LED Tube or other drivers equipped LED lamp

FEATURES

- Excellent luminous flux to facilitate the evacuation during the event of power cuts.
- Comply with European standards EN 61 347-2-7 and offer a high level of quality and safety meeting the various prevailing regulations.
- Dial the code to a suitable voltage of luminaries.
- The emergency module is invisible and convenient to install on wall, ceiling and any buildings.



SPECIFICATIONS

Driver Type LED Emergency Ballast

Support Lamps LED Tube or other drivers equipped LED lamp

Battery Type Ni-Mh AA 2000mAh, 12V

Dimmable No

Self-Test Ability No

Warranty 3 Years

Surge-Protection Yes

LED Indicator ϕ 5mm Green LED with
300mm Line, 26#

OPERATION SPECIFICATIONS

Output Power 1~10 Watt

Input Voltage 85-265V AC

Output Voltage 220V AC

Charge Current 0.05C

Illumination Time 3-4 Hour


Recharge Time 24 Hours

Mode Switch Time <0.5 Sec

Disclaimer: Sanforce© reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.



WIRING DIAGRAM

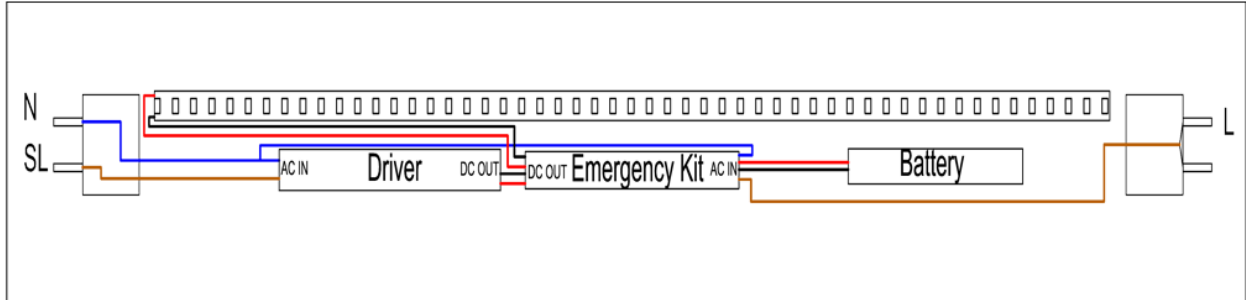

PHYSICAL PROPERTIES

Weight	100 g/pcs
Dimension(mm)	217x40x30
Battery Dimension(mm)	140x50x15
Encasing Dimension(mm)	200x100x53

TEMPERATURE AND RATINGS

Ambient Temperature	-20 to 45°C
Operating Temperature	70°C
IP Rating with Casing	67

SERVICES AND WARRANTY

- Packaging Detail: Standard packaging with export carton or according to requirements.
- Delivery Detail: 7-10 working days for samples, 10-20 days for mass production.
- The warranty period is 3 years or above. According to national standards, a replacement is mandatory after constantly using for 3 years. During the warranty period, it can be replaced with any quality problems (except for man-made factors).
- Requires professional maintenance after emergency power installation, in case any abnormal condition happens, please maintenance in time or inform our company to send professionals to provide technical support.

NOTE

Nickel Metal Hydride (Ni Mh) Battery Shipping Regulations to comply with IATA provisions for air transporting nickel metal hydride batteries. Please visit the following site to learn more:
<https://www.iata.org/contentassets/b08040a138dc4442a4f066e6fb99fe2a/guidance-document-nickel-metal-hydride-batteries-en-201608.pdf>

Disclaimer: Sanforce© reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.





No.29, Longfeng Road, Xinsheng, Longgang District, Shenzhen City, China

Tech Support: 0755-89648670, 0755-84293891 Fax: 0755-89648671

Email: info@sanforce-tech.com

www.sanforce-tech.com